


C3005ND-A1

C4505ND-A1

C6005ND-A1

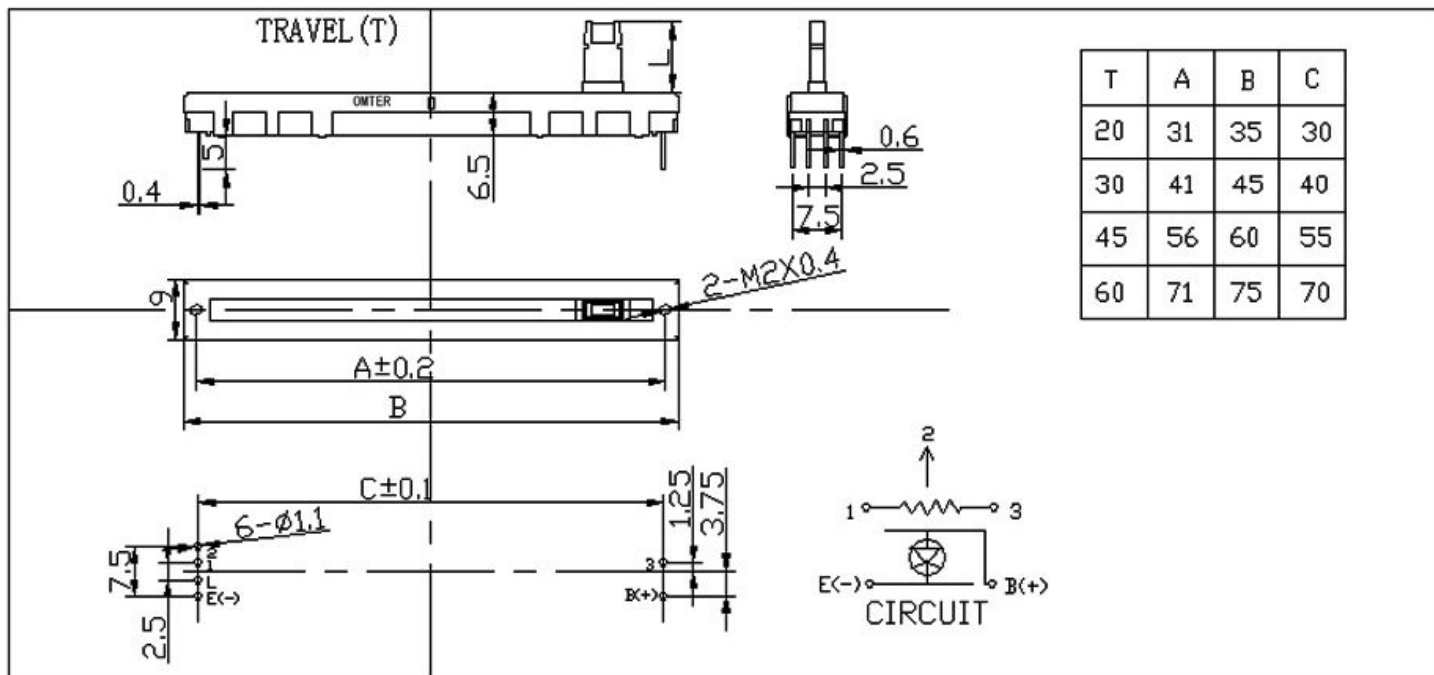

### 参数特性General Specification:

全阻抗值: Total Resistance	1KΩ~1MΩ
全阻抗值容许差: Total Resistance tolerance	±20%(More than 500kΩ ±30%)
残留阻值: Residual resistance	R<10KΩ, 10Ω
	10KΩ ≤ R ≤ 100KΩ, 20Ω
	100 KΩ < R ≤ 500 KΩ, 1-2T:30Ω, 2-3T:50Ω
	500 KΩ < R ≤ 1 MΩ, 1-2T:30Ω, 2-3T:50Ω
抵抗变化特性: Resistance Tape	A, B, C, D
定格电力: (W) Ratings Power	Single unit, B curve, 0.1W;
	except B, 0.05W
	Dual unit, B curve, 0.05W;
	except B, 0.025W
最高使用电压:Max. operation voltage	Linear taper B, AC200V
	Other tapers AC150V
滑动杂音:Slider noise	100mV以下 Less than 100mV
绝缘抵抗:Insulation Resistance	More than 100mΩ at DC 250V
耐电压:Voltage proof	1minute at AC 300V
连动误差:Gang error	-40~0dB at ±3dB(for dual unit only)
滑动寿命:Sliding Life	More than 10,000 cycles Min
滑动力矩:Operating Force	20~200gf.cm
滑动止动强度:Lever stopper strength	3Kgf
把柄之偏心:Lever deviation	0.5Max(one side)
中心定位力:Click slip-out force	30~250gf.cm
把柄推拉强度:Level Push-pull strength	3Kgf.cm Max at 5 sec.